


# Titan Fix Round Cone 92mm custom

Technical Datasheet

**DOXIS**  
LIGHTING FACTORY

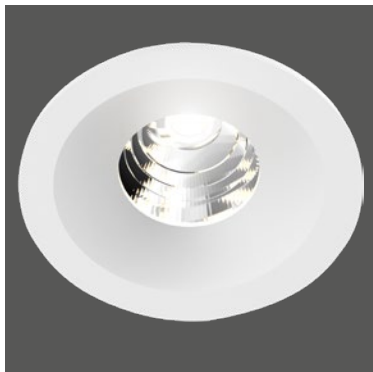


General	
Type	Recessed Downlight
Material	Aluminium
Lamp Type	COB LED
Adjustable	No (Fixed)
Dimmable	Yes
Cooling	Passive
Energy Class	F
Weight	260g
Photobiol. Safety	RG1
Class (luminaire)	class III
Class (driver)	class II

**IP44**  
When built-in



**LED**

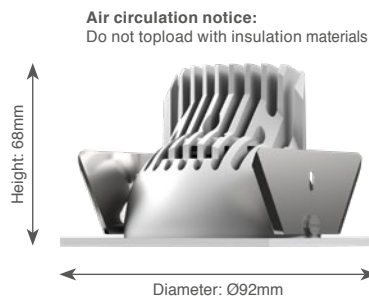

Fixed



**Features:**

High efficiency LED Downlight, equipped with a Bridgelux or Dim-to-Warm COB LED.  
Aluminium die-casted, compact design.  
High quality components.  
Various colors available.  
Glass insert

**Specifications**

Art. nr.	Lightsource INCLUDED	CCT - CRI	Light output* LED / System	Efficacy** LED / System	Power** LED / System (current)	Power supply INCLUDED	SDCM
3009.40.27.927.XX-PL	Bridgelux Vero 10 LED	2700K - Ra90	1100lm / 937lm	124lm/W / 92lm/W	8.9W / 10.2W (350mA)	Mains dimmable driver (490.27.20)	3
0000.40.00.000.XX-PL							

\* LED light output represent values of LED chip. System light output incl. light losses of luminaire (40° reflector used as reference)  
\*\* LED power values excl. driver. System power values incl. driver power consumption (driver efficiency of 87% used as reference)

40 - 40° Reflector - 0000.40.00.000.00-0

Available colors - 0000.00.00.000.XX-0



**01**  
White Matt Text.  
Standard

**03**  
Black Matt Text.  
Standard

**Lumen Maintenance Bridgelux COB LED (Tc=85°C)**


L70B50: >100 000 hrs	L70B20: >100 000 hrs	L70B10: >100 000 hrs
L80B50: >100 000 hrs	L80B20: >100 000 hrs	L80B10: >100 000 hrs
L90B50: >100 000 hrs	L90B20: >50 000 hrs	L90B10: >50 000 hrs

**Forward voltages (Tc=85°C)**

Bridgelux Vero 10	23V.0 (min.) - 25.5V(typ.) - 28.0V(max.)
-------------------	--

**Titan with "Cone" frontring:**

Shape:



**DOXIS**  
LIGHTING FACTORY

Horizonlaan 30 | B-3600 Genk | Belgium  
T+32 (0)89.62.15.11 | F+32 (0)89.62.15.12 | info@doxis.be  
www.doxis.be



Datasheet subject to change  
Update: 28/06/2023  
Page 1-1